



# LOGOS

## High Pressure Relief Valve



Product Catalog

The High Pressure Relief Valve is capable of operating at pressures up to 750 Barg, with various setting options available to meet different requirements. It features a single body option but can be specially designed for different connection types or body designs.

The valve is cleaned in accordance with DEF-STAN 58/96 standards, ensuring high reliability and safety. Additionally, it complies with MIL-STD 810 G tests, making it suitable for demanding environments and applications.




Small-bodied and Lightweight

316SS Body Structure

It maintains the purity of the fluid passing through it in accordance with DEF-STAN 58/96 (Table 2).



Easy to install

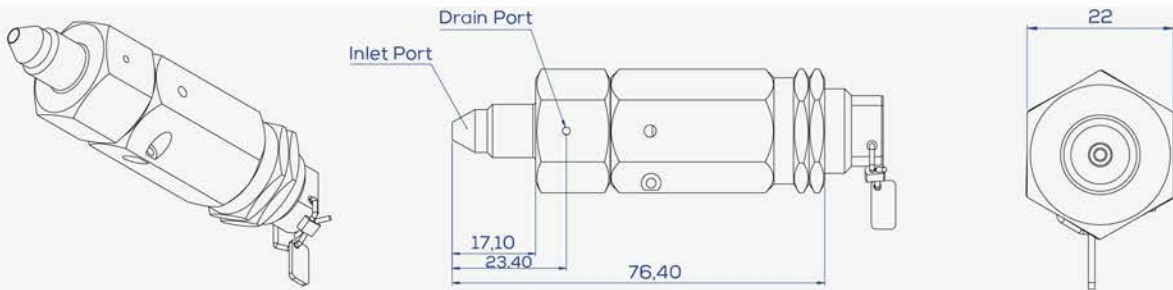

Maximum Working Pressure	1000 Bar
Ambient Temperature Range	-40 / 120°C
Reset	±%10
Precision	±%5
Flow Capacity	For Flow Curve See 240514 Logos Catalog
Vent Port Size	1/16" Welded Pipe
Input Port	LM4*
Weight	200 gr
Dimensions	95 x 22 Hex

\* For different types of connections please contact.





# LOGOS



#### Address

Logos Kimya Teknolojileri Sanayi ve Ticaret Ltd. Şti.  
OstimOSB Mah. 1151. Sk No: 66 Gül 86 Sitesi  
Yenimahalle Ankara Türkiye

#### Contact

Phone: +90(312) 385 20 82  
Email: [info@logoskimya.com](mailto:info@logoskimya.com)